


Hosefloats 130

9 Advantage Dr
Dandenong,
Vic 3175

www.pipefloats.com

P | +61 7 3888 - 8327
F | +61 7 3888 - 8329
E | sales@pipefloats.com

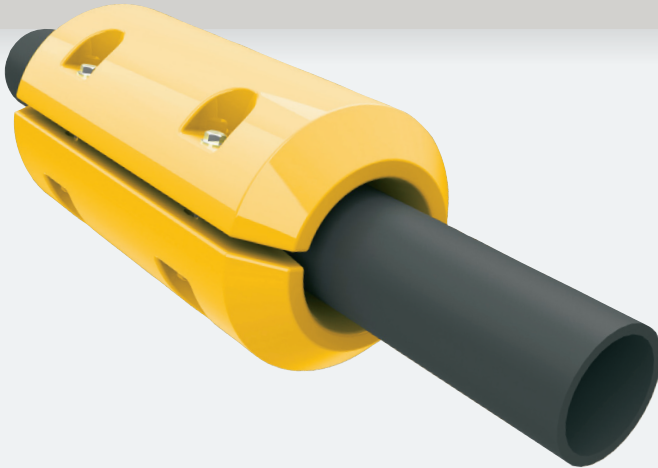

Hosefloats, an industry standard for the floatation of hoses, conduit and cables for dredging, mining and marine applications.

An easy to install solution that allows pipes to bend and flex, while maintaining low resistance to waves, wind and current.

Inclusions

A hosefloat set comprises:

- 2 pipefloat halves
- 2 variable rubber bushes
- A galvanised assembly kit which includes:
 - 4 Rods
 - 8 Nuts
 - 8 Washers

Specifications

- Manufactured from polyethylene.
- Standard colour is yellow. ■
- Stainless steel inserts used in crush areas.
- Rubber Bushes are manufactured from EPDM which is totally resistant to harsh environments.
- All floats are pressure tested prior to despatch.
- Recyclable and VOC Free.
- Australian made and designed.
- Specifications are subject to change without notice.

Stainless Steel Kit

Marine Grade, SAE 316 stainless steel assembly kits for corrosive environments are available at an additional cost.

- Kit includes: 4 Rods, 8 Nuts and 8 Washers.

Hosefloat 130

HOSE O / D	LENGTH	WEIGHT	RESERVE BUOYANCY
10-50 mm	600 mm	405.0 kg	22 kg
50-80 mm	600 mm	405.0 kg	22 kg
80-130 mm	600 mm	4055.0 kg	22 kg
2 x RUBBER BUSH PER FLOAT		2.0 kg	
HOSEFLOAT SPACING GUIDE	Water : 4 sets for every 12 meters of pipe Slurry : 7 sets for every 12 meters of pipe eg. 100m Waterpipe: (100m/12m) x 4 = 33 Floats		
PACKING GUIDE			
PALLET LOAD	1.2m x 1.2m x 2.25m (height) 59 Sets per pallet Approx Weight 405Kg		

* **RESERVE BUOYANCY** is the weight the float will carry before full submergence.
 * **O/D** is the Outside Diameter.
 * Dimensions and weights are nominal.

Variable Rubber Bush to suit hose, conduit or cable diameters from 10mm to 130mm.

